





Art.Nr. **LF2024H**



- 50W
- 4500Lm
- 4000K – neutral white
- IP44
- AC220 - 265V
- 120°
- F
- Recommended ambient temperature -25° to +45°C
- AL-black
- 4mm tempered reflective glass, ANTI-dazzling
- Adjustable stand
- 1,2m-3x1.0mm VDE, EU
- IK08
- Dimension 243 x 298 x 21 mm
- Weight netto – 580g
- 30000h
- Warranty 3 years
- Non-dimmable
- Packing 1/10

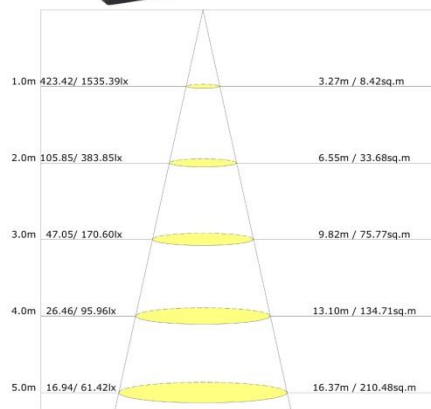


Art.Nr. **LF2024H**

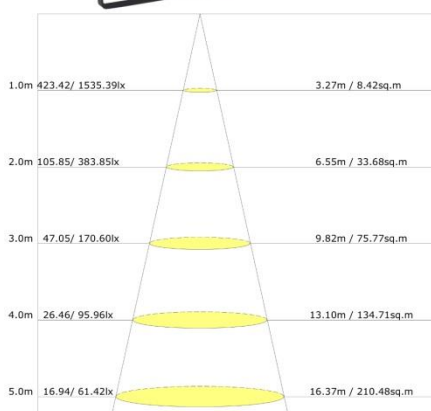

- 50W
- 4500Lm
- 4000K – neutrálna biela
- IP44
- AC220 - 265V
- 120°
- F
- Doporučená teplota okolia -25° až +45°C
- AL-čierna
- 4mm tvrdené, anti-oslnivé sklo
- Nastaviteľný stojan
- 1,2m-3x1.0mm VDE, EU
- IK08
- Rozmer 243 x 298 x 21 mm
- Hmotnosť netto – 580g
- 30000h
- Záruka 3 roky
- Nestmievateľné
- Balenie 1/10




Art.Nr. **LF2024H**

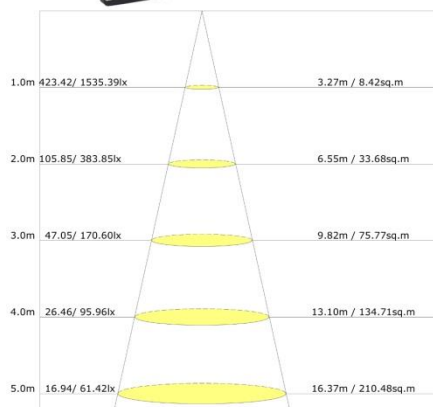

- 50W
- 4500Lm
- 4000K – neutrální bílá
- IP44
- AC220 - 265V
- 120°
- F
- Doporučená teplota okolí -25° až +45°C
- AL-černá
- 4mm tvrzené, anti-oslnivé sklo
- Nastavitelný stojan
- 1,2m-3x1.0mm VDE, EU
- IK08
- Rozměr 243 x 298 x 21 mm
- Hmotnost netto – 580g
- 30000h
- Záruka 3 roky
- Nestmívatelné
- Balení 1/10




Art.Nr. **LF2024H**

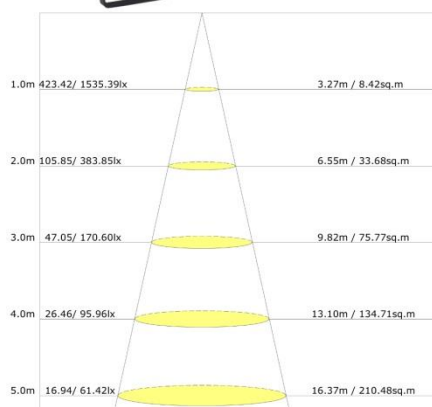

- 50W
- 4500Lm
- 4000K – természetes fehér
- IP44
- AC220 - 265V
- 120°
- F
- Ajánlott környezeti hőmérséklet -25° és +45°C
- AL-fekete
- 4.0mm edzett reflex üveg, tükröződésmentes
- Állítható állvány
- 1,2m-3x1.0mm VDE, EU
- IK08
- Méret 243 x 298 x 21 mm
- Nettó tömeg – 580g
- 30000h
- 3 év garancia
- Dimmelhető – nem
- Csomagolás 1/10



Art.Nr. **LF2024H**

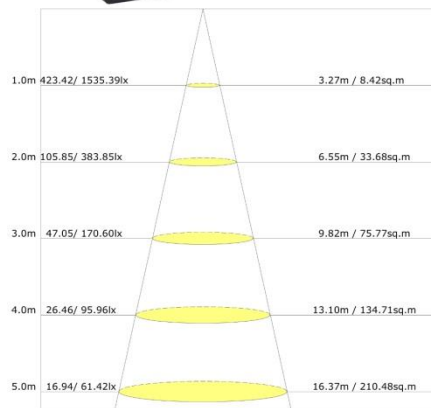

- 50W
- 4500Lm
- 4000K - Neutralweiß
- IP44
- AC220 - 265V
- 120°
- F
- Empfohlene Umgebungstemperatur -25° bis +45°C
- AL-Schwarz
- 4mm gehärtetes reflektierendes Glas, ANTI-blendend
- verstellbarer Ständer
- 1,2m-3x1.0mm VDE, EU
- IK08
- Dimension 243 x 298 x 21 mm
- Nettogewicht – 580g
- 30000St
- Garantiezeit 3 Jahre
- Nicht dimmbar
- Verpackung 1/10