


Product sheet



Art.Nr. **LU222/1**



1m	5519,114931lx	191,30cm
2m	1380,28731lx	382,59cm
3m	613,2,12771lx	573,89cm
4m	344,9,718,31lx	765,18cm
5m	220,7,459,71lx	956,48cm
6m	153,3,319,31lx	1147,77cm
7m	112,6,234,61lx	1339,07cm
8m	86,23,179,61lx	1530,36cm
9m	68,13,141,91lx	1721,66cm
10m	55,19,114,91lx	1912,95cm

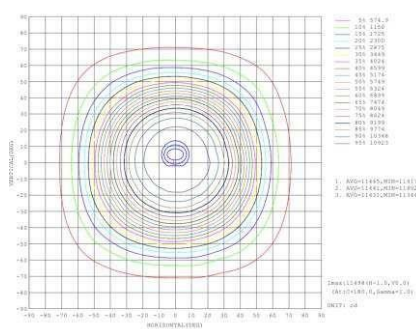

- 150W
- AC100 - 277V
- IP65
- IK08
- PF > 0,96
- 22 500Lm
- Dimension Ø340 x 130 mm
- 5000K – neutral white
- D
- 90°
- 50000h
- Warranty 5 years (ZH DRIVER, HONGLI LED)
- Recommended ambient temperature -30° to +55°C
- Metal-black
- Dimmable 1-10V
- Weight netto - 2730g
- Packing 1/4


Produktový list



Art.Nr. **LU222/1**



1m	5519,114931lx	191,30cm
2m	1380,28731lx	382,59cm
3m	613,2,12771lx	573,49cm
4m	344,9,718,31lx	765,19cm
5m	220,7,459,71lx	956,48cm
6m	153,3,319,31lx	1147,77cm
7m	112,6,234,61lx	1339,07cm
8m	86,23,179,61lx	1530,36cm
9m	68,13,141,91lx	1721,66cm
10m	55,19,114,91lx	1912,95cm

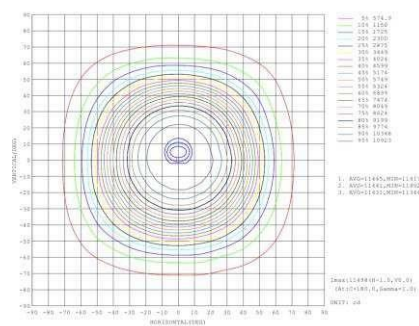

- 150W
- AC100 – 277V
- IP65
- IK08
- PF > 0,96
- 22 500Lm
- Rozmer Ø340 x 130 mm
- 5000K – neutrálna biela
- D
- 90°
- 50000h
- Záruka 5 rokov (ZH DRIVER, HONGLI LED)
- Doporučená teplota okolia -30° až +55°C
- Metal-čierna
- Stmievateľné 1-10V
- Hmotnosť netto - 2730g
- Balenie 1/4

<https://nedes.sk/led-svietidlo-ufo-150w/ip65/5000k/1-10v-lu222/1/p369>


Produktový list



Art.Nr. **LU222/1**



1m	5519,11493lx	191,30cm
2m	1380,2873lx	382,59cm
3m	613,2,1277lx	573,49cm
4m	344,9,718,3lx	765,19cm
5m	220,7,459,7lx	956,48cm
6m	153,3,319,3lx	1147,77cm
7m	112,6,234,6lx	1339,07cm
8m	86,23,179,6lx	1530,36cm
9m	68,13,141,9lx	1721,66cm
10m	55,19,114,9lx	1912,95cm

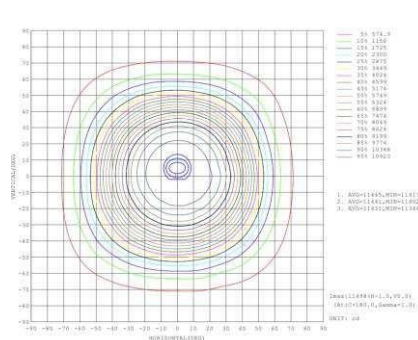

- 150W
- AC100 - 277V
- IP65
- IK08
- PF > 0,96
- 22 500Lm
- Rozměr Ø340 x 130 mm
- 5000K – neutrální bílá
- D
- 90°
- 50000h
- Záruka 5 let (ZH DRIVER, HONGLI LED)
- Doporučená teplota okolí -30° až +55°C
- Metal-černá
- Stmívatelné 1-10V
- Hmotnost netto - 2730g
- Balení 1/4

<https://nedes.cz/led-svitidlo-ufo-150w/ip65/5000k/1-10v-lu222/1/p-369>


Termék adatlap



Art.Nr. **LU222/1**



1m	5519,114931lx	191,30cm
2m	1380,28731lx	382,59cm
3m	613,2,12771lx	573,89cm
4m	344,9,718,31lx	765,18cm
5m	220,7,459,71lx	956,48cm
6m	153,3,319,31lx	1147,77cm
7m	112,6,234,61lx	1339,07cm
8m	86,23,179,61lx	1530,36cm
9m	68,13,141,91lx	1721,66cm
10m	55,19,114,91lx	1912,95cm

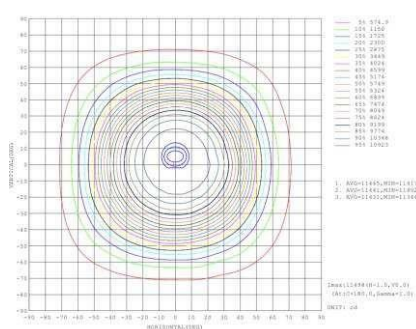


- 150W
- AC100 - 277V
- IP65
- IK08
- PF > 0,96
- 22 500Lm
- Méret \varnothing 340 x 130 mm
- 5000K - természetes fehér
- D
- 90°
- 50000h
- 5 év garancia (ZH DRIVER, HONGLI LED)
- Ajánlott környezeti hőmérséklet 30° és +55°C
- Metal-fekete
- Dimmelhető 1-10V
- Nettó tömeg - 2730g
- Csomagolás 1/4



Art.Nr. **LU222/1**



1m	5519,114931lx	191,30cm
2m	1380,28731lx	382,59cm
3m	613,21277lx	573,89cm
4m	344,9718,3lx	765,18cm
5m	220,7459,7lx	956,48cm
6m	153,3359,3lx	1147,77cm
7m	112,6234,6lx	1339,07cm
8m	86,23179,6lx	1530,36cm
9m	68,13141,9lx	1721,66cm
10m	55,19114,9lx	1912,95cm

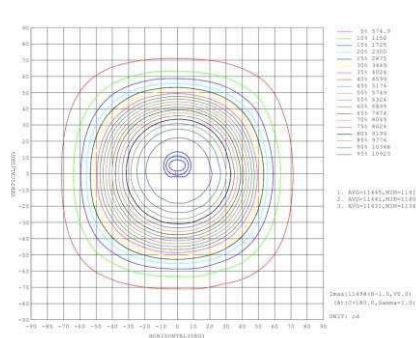

- 150W
- AC100 - 277V
- IP65
- IK08
- PF > 0,96
- 22 500Lm
- Dimension Ø340 x 130 mm
- 5000K – Neutralweiß
- D
- 90°
- 50000St
- Garantiezeit 5 Jahre (ZH DRIVER, HONGLI LED)
- Empfohlene Umgebungstemperatur -30° bis +55°C
- Metall-Schwarz
- Stmievateľné 1-10V
- Nettogewicht - 2730g
- Verpackung 1/4